

50Hz

iT1500 Ice Cube Machine

iIT1500 Ice Cube Machine

Models

☐ IDT1500A ☐ IDT1500W ☐ IDT1500N ☐ IYT1500A ☐ IYT1500W ☐ IYT1500N


Indigo NXT Series iT1500
Ice Machine on D970 Bin

*Ice machine and bin sold separately

Designed for operators who know that ice is critical to their business, the Indigo NXT Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

- **New levels of Performance** - Showcasing an average of 6% lower energy consumption, up to 9% increase in ice production and a 9% reduction in condenser water usage. This translates into lower cost of ownership over the life of your machine.
- **easyTouch® Display** - New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Multiple Language Capability** - The easyTouch display is available in multiple languages selected in the initial start-up installation Wizard.
- **Programmable Ice Production** - Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume and night time programming.
- **Easy to Clean Foodzone** - Easy Access front door panel. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** - Provides 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** - Unique patented technology allows for reliable operation in challenging water conditions and environments.
- **DuraTech® Exterior** - Provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- Available **LuminIce® II Virus and Bacteria Inhibitor** - Controls viruses, bacteria, mold and yeast within the food zone to keep the machine clean longer. A new sanitation icon lets you know the operational status.
- **Active Sense** - insures consistent ice harvest in all environmental conditions. This software solution works in conjunction with the acoustical ice sensing probe improving reliability and performance.



Ice Machine Electric

230/50/1

Minimum circuit ampacity:

Air-cooled: 14.3 1ph
Water-cooled: 13.5 1ph
Remote-cooled: 14.6 1ph

Maximum fuse size:

Air-cooled: 20 1ph
Water-cooled: 20 1ph
Remote-cooled: 20 1ph

Specifications

BTU Per Hour:

23,000 (average),
and 27,000 (peak)

Refrigerant:

R-410 CFC-free

Operating Limits:

- Ambient Temperature Range:
40 to 110 F (4.4 to 43.3 C)
Water Temperature Range:
40 to 90 F (4.4 to 32.2 C)
- Potable Water Pressure:
Min. 20 psi (137.9 kPa)
Max. 80 psi (551.1 kPa)
- Condenser Water Pressure:
Min. 20 psi (137.9 kPa)
Max. 276 psi (1902.95 kPa)

Ice Shape



Half Dice
3/8" x 1 1/8" x 7/8"
(.95 x 2.86 x 2.22 cm)
Cube weight 5.7 g



Dice
7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)
Cube weight 8.5 g



Regular
1 1/8" x 1 1/8" x 7/8"
(2.86 x 2.86 x 2.22 cm)
Cube weight 14.2 g





iT1500 on D970 Storage Bin

- Ⓐ Electrical Entrance (2) Options
- Ⓑ 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- Ⓒ 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- Ⓓ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- Ⓔ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- Ⓕ 1/2" (1.27 cm) Auxiliary Base Drain Socket
- Ⓖ 3/4" (1.91 cm) Bin Drain


Installation Note

Air Cooled clearance:

Top: 24" (61.0 cm)
Sides: 24" (61.0 cm)
Back: 5" (30.5 cm)

Water Cooled clearance:

Top/Sides: 8" (20.3 cm) Back: 5" (12.7 cm)

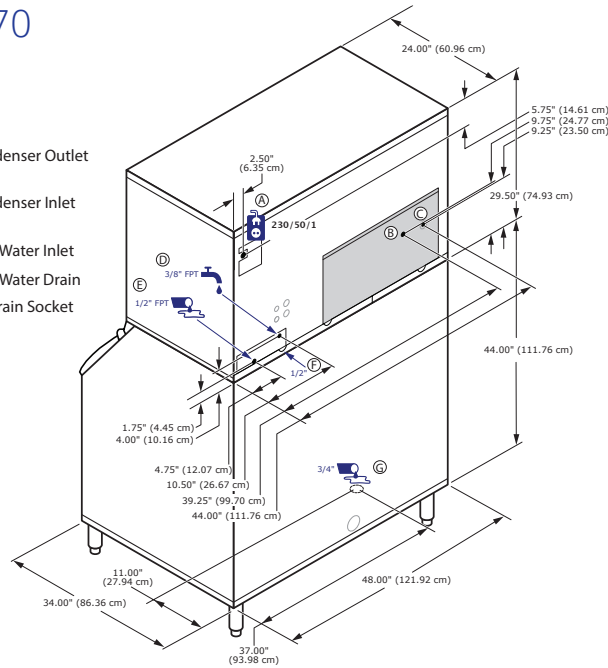

Space-Saving Design



	iT1500 D970
Height	79.50" 201.90 cm
Width	48.00" 121.92 cm
Depth	34.00" 86.30 cm
Bin Storage	882lbs 400kgs

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Application capacity -measured 90% of the total volume in cu. ft. x 33 lbs/ft³.

Specifications

	Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh 45.4 kg / 100 lbs @ 32°Air / 21°C Water 90°Air / 70°F Water	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
			21°Air / 10°C Water 70°Air/ 50°F Water	32°Air / 21°C Water 90°Air/ 70°F Water	1 Ph	
AIR-COOLED	IDT1500A	dice 	1,487 lbs.	1,170 lbs.	4.21	20 Gal.
			674 kgs	531 kgs		75.7 L
	IYT1500A	half-dice 	1,487 lbs.	1,249 lbs.	4.21	20 Gal.
			674 kgs	567 kgs		75.7 L
WATER-COOLED	IDT1500W	dice 	1,422 lbs.	1,304 lbs.	3.27	20 Gal.
			645 kgs	591 kgs		75.7 L
	IYT1500W	half-dice 	1,427 lbs.	1,272 lbs.	3.50	20 Gal.
			751 kgs	624 kgs		75.7 L
	* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 145 gal./ 549 L.					
REMOTE-COOLED	IDT1500N	dice 	1,422 lbs.	1,272 lbs.	3.90	20 Gal.
			645 kgs	577 kgs		75.7 L
	IYT1500N	half-dice 	1,650 lbs.	1,480 lbs.	3.90	20 Gal.
			748 kgs.	671 kgs		75.7 L

Order separately: Ice storage bin for all units, line-set and remote condenser unit JCT1500 for remote cooled units.

This product is hermetically sealed and contains fluorinated greenhouse gas R410A

Accessories

**LuminIce® II
Virus and Bacteria
Inhibitor**
controls viruses and
bacteria inside the ice
machine.



External Scoop holder

protect the ice scoop
with the NSF approved
versatile scoop holder.



Arctic Pure® Water Filters

reduces sediment
and chlorine odors
for better tasting ice.



Welbilt reserves the right to make changes to the design or specifications without prior notice.

Welbilt Deutschland GmbH
Auf der Weih 11
D - 35745 Herborn, Germany
Tel.: +49 27 72 58 050
welbilt.com.de

Welbilt Iberia, S.A.U
Textil, 6 - Pol.Ind. La Ferreria - 08110
Montcada i Reixac
Barcelona, Spain
Tel.: +34 902 20 10 69
welbilt.com.es

Welbilt UK
Ashbourne HouseThe Guildway,
Old Portsmouth RdGuildford GU3
1LRUnited KingdomTel.:
+44 1483 464900
www.welbilt.uk

